



ANCO Leuchten KG
Eyrns - Gewerbegebiet 1
39023 - Laas (BZ)
Italien

IT00222550212
www.ancoleuchten.it
info@ancoleuchten.it
+39 0473739788


Automatisch generiertes
Dokument.
Technische Änderungen
vorbehalten.

Datenblatt

Treiber CC Multicurrent 40W DALI2-DIMM



Produktnummer: D10LCM-40DA2

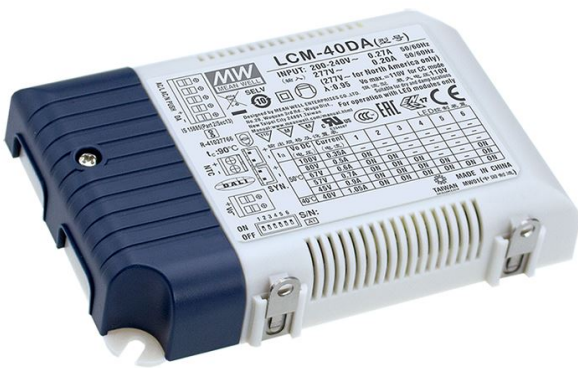

■ DIP SWITCH TABLE
LCM-40DA2 is a multiple-stage constant current driver; selection of output current through DIP switch is exhibited below.

Output Current	1	2	3	4	5	6
350mA	ON	ON	ON	ON	ON	ON
500mA	ON	ON	ON	ON	ON	OFF
600mA	ON	ON	ON	ON	OFF	OFF
700mA (factory default)	ON	ON	ON	OFF	OFF	OFF
900mA	ON	ON	OFF	OFF	OFF	OFF
1050mA	ON	OFF	OFF	OFF	OFF	OFF

Note: For more current setting, please contact MEAN WELL.

Beschreibung

Treiber Konstantstrom mit Multicurrent-Output einstellbar mittels DIP-Switch. Max. 42W, 180-295Vac, Output 350/500/600/700/900/1050mA. Dimmbar DALI/Push/1-10V/PWM/Potentiometer. Schutzklasse IP20, Gehäuse aus Kunststoff. Maße: 123,5x81,5xH23mm

Produktinformationen

Dimmbar:	dimmbar DALI, dimmbar PUSH
-----------------	----------------------------